

# STAINLESS LCD


## 21.5" (16:9) Specifications



Model Name	STW215L100
Viewable Size Image	21.5" (16:9)
Active Display Area (mm)	476.64(H)x268.11(V)
Pixel Pitch (mm)	0.24825(H)x0.24825(V)
Number of Pixels	1920x1080
Contrast Ratio	3000:1
Display Color	16.7M
Brightness (cd/m <sup>2</sup> )	250
Viewing Angle (CR ≥ 10)	-85~85(H); -80~80(V)
Synchronization Range	
Horizontal/Vertical	31.5~80.0KHz/60~75Hz
Recommended Resolution	1920x1080 @ 60Hz
Signal Connector	15 pin D-Sub
Power Source	12V DC in, with External AC to DC Adapter (100~240V AC)
Power Consumption	25W typical, normal operation
Power Management	VESA DPMS Compliant
Plug & Play	VESA DDC 1/2B
Optional Video Input	S-Video, Composite
Optional DVI Input	Yes
Optional Touch Screen	Resistive

Remarks: STW215L100 = VGA input only  
STW215L110 = VGA+Video Input

## Mechanical Drawing

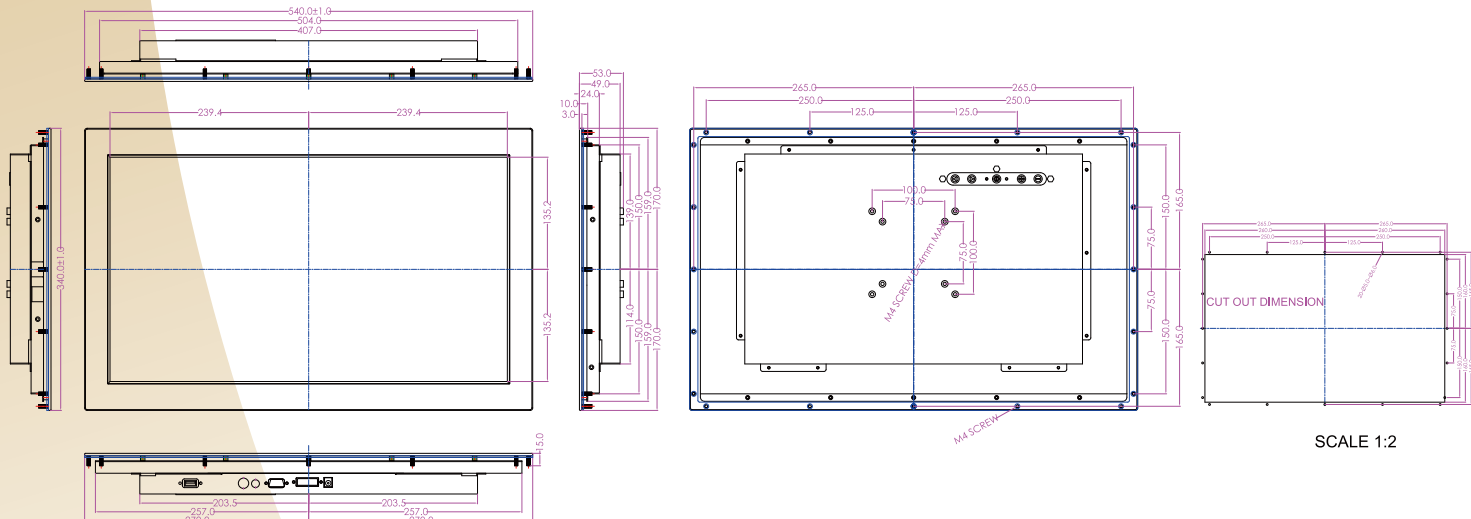

SCALE 1:2

\*

Note: this is a simplified drawing and some components are not marked in detail. Please contact our sales representative if you need further product information.